


PLAN VIEW

CAST IRON REMOVED FOR CLARITY


GALLONS	1000	1500	2000
A	3"	3"	3"
B	3"	3"	4"
C	48"	48"	58"
D	51"	51"	62"
E	53"	53"	65"
F	55"	68"	64"
G	61"	74"	72"
H	66"	66"	78"
J	92"	115"	124"
K	98"	121"	132"
L	18"	18"	19"
WEIGHT	7,300 LBS.	10,200 LBS.	16,000 LBS.

GENERAL NOTES:


1. CONCRETE = 5000 PSI @ 28 DAYS, AIR 6% ± 2%.
2. REINFORCING = 6x6/W1.4xW1.4 W.W.F. MINIMUM.
3. F AND J DIMENSIONS MINIMUM.
4. LARGER TANKS AVAILABLE ON REQUEST.
5. FOR MINIMUM EXCAVATION SIZE ADD 12" TO G AND K.
6. GAS BAFFLE IN 1000 GALLON ONLY.
7. TOP 18" OF INTERIOR OF TANK TO BE COATED WITH TWO COATS OF CONSEAL CS-55.
8. INLET AND OUTLET INSPECTION PLUGS TO BE SEALED IN PLACE WITH CONSEAL CS-104 SEALANT.
9. TANK AS SHOWN IS APPROVED AND MANUFACTURE PER ASTM-913 AND ASTM-890.
10. JOINT SEALANT TO BE CONSEAL CS-102.

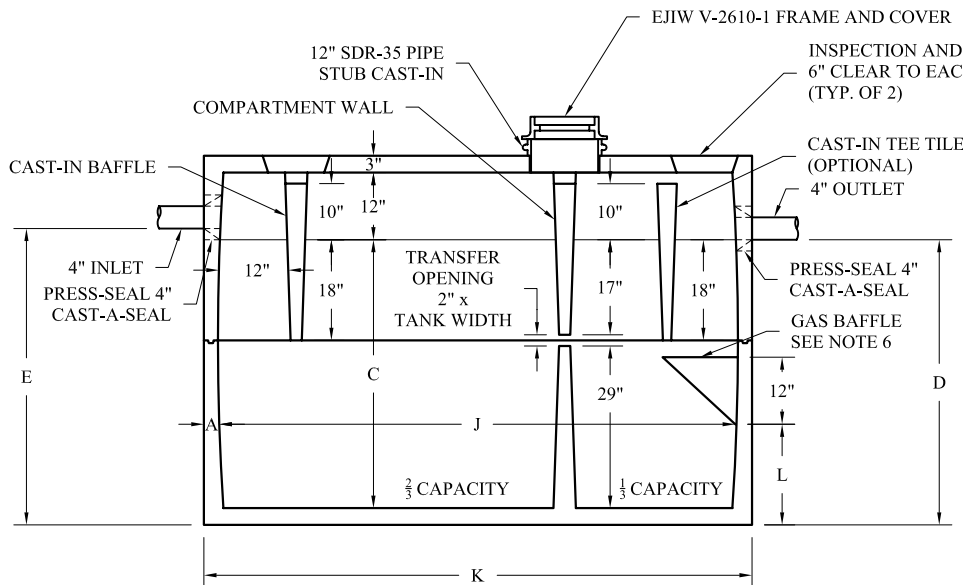

SECTION B-B

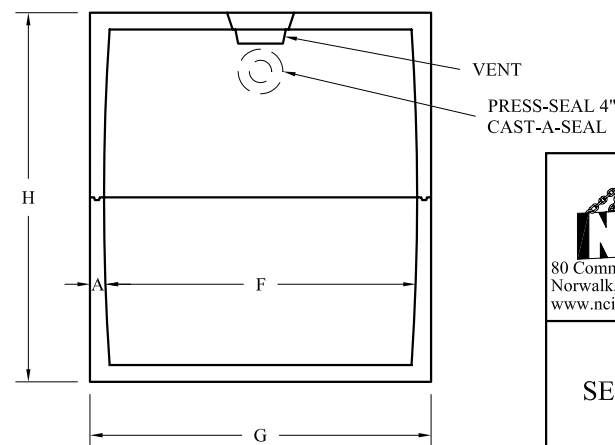

SECTION C-C


Norwalk Concrete Industries
 80 Commerce Drive
 Norwalk, Ohio 44857
 www.nciprecast.com
 (800) 733-3624 Toll Free
 (419) 668-8167 Phone
 (419) 663-0627 Fax

**PRECAST CONCRETE
 SEPTIC TANKS/TRASH TRAPS
 (WAKEMAN TANK)**

REVISIONS:	DWG. NO.	DATE	SHT. -
	W-0027-06	10-23-06	OF -
			JDH